


Order no.	Packing unit	PS
-----------	--------------	----

TV / Multimedia




Cover plate for coaxial antenna socket

cream white glossy	0869 01	10/100	01
pure white glossy	0869 03	10/100	01
pure white matt	0869 27	10/100	01
anthracite	0869 28	10/100	11
colour aluminium	0869 26	10/100	11

Third hole can be broken out.

Antenna sockets 0041 00, 0042 00, 0046 00 and 0937 00 → Page 294.




Central plate (50 x 50 mm) for coaxial-antenna socket, 4-gang with 2 additional SAT connections from Hirschmann

cream white glossy	0258 01	5	01
pure white glossy	0258 03	5/25	01
black	0258 10	5	01

To integrate this central plate in the switch range, the intermediate plate with a square cut-out for devices from other manufacturers (50 x 50 mm) **0282 .. must** be used.

Intermediate plate 0282 .. → Page 35.



Central plate (50 x 50 mm) for coaxial-antenna socket, 4-gang with 2 additional SAT connections for Ankaro, ECG-Elektro, Astro

cream white glossy	0259 01	5	01
pure white glossy	0259 03	5/25	01
black	0259 10	5	01


Fits antenna socket, 4-gang Sat 400/EAS/DC from Ankaro, SEV 2 from ECG-Elektro and GUT 400 from Astro.

To integrate this central plate in the switch range, the intermediate plate with a square cut-out for devices from other manufacturers (50 x 50 mm) **0282 .. must** be used.

Intermediate plate 0282 .. → Page 35.

Order no.	Packing unit	PS
-----------	--------------	----

Acoustics

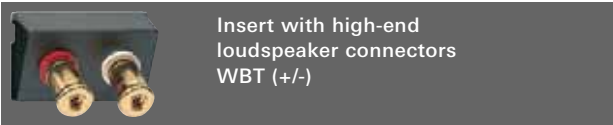

Insert with high-end loudspeaker connectors WBT (+/-)


0091 00	5	01
---------	---	----

For the professional connection of loudspeaker cables up to max. 10 mm² via sub-terminals via screwed nuts or via 4 mm banana plugs.

Does not fit water-protected surface-mounted system.

Material: OFC copper, 24-carat gold plated
Contact resistance: ≤ 0.1 mΩ with terminal attachment
≤ 0.15 mΩ with attachment via standard banana plug

Fits data cap 0870 .. → Page 35.

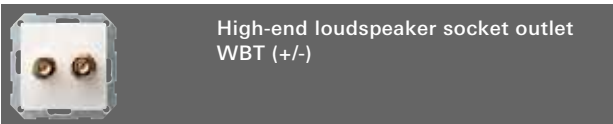

High-end loudspeaker socket outlet WBT (+/-)

cream white glossy	0407 01	1/5	01
pure white glossy	0407 03	1/5	01
pure white matt	0407 27	1/5	01
anthracite	0407 28	1/5	11
colour aluminium	0407 26	1/5	11

For the professional connection of loudspeaker cables up to max. 10 mm² via sub-terminals via screwed nuts or via 4 mm banana plugs.


Material: OFC copper, 24-carat gold plated
Contact resistance: ≤ 0.1 mΩ with terminal attachment
≤ 0.15 mΩ with attachment via standard banana plug



Chinch socket outlet

cream white glossy	0403 01	1/5	01
pure white glossy	0403 03	1/5	01
pure white matt	0403 27	1/5	01
anthracite	0403 28	1/5	11
colour aluminium	0403 26	1/5	11

For line diameter up to 10 mm², use insert for high-end loudspeaker plug (WBT) **0091 00** and data cap **0870 ..** or cover plate for loudspeaker plug (WBT) **0407 ..**

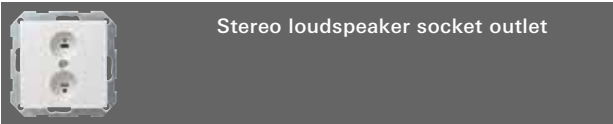

Stereo loudspeaker socket outlet

cream white glossy	0402 01	1/5	01
pure white glossy	0402 03	1/5	01
pure white matt	0402 27	1/5	01
anthracite	0402 28	1/5	11
colour aluminium	0402 26	1/5	11

With screw terminals.

Connectable line diameter max. 1.5 mm².

For line diameter up to 10 mm², use insert for high-end loudspeaker plug (WBT) **0091 00** and data cap **0870 ..** or cover plate for loudspeaker plug (WBT) **0407 ..**