


Order no.	Packing unit	PS
-----------	--------------	----

Push button sensor 2, 3-gang without controller

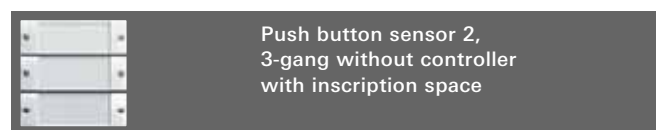

System 55			
transparent white	1013 100	1/5	06
E22			
Stainless steel (lacquered)	1013 20	1/5	06
Aluminium (lacquered)	1013 203	1/5	06
transparent white	1013 100	1/5	06
Bus coupler	0570 00	1/5	06

Neutral inscription labels included.

Product family: Push button

Product type: Push button, 3-gang

The push button sensor is attached to a flush-mounted bus coupler. Disassembly safeguard implemented via its being screwed down. The following software variants are to be programmed with ETS 2:

- Switching with status indicator (red LED)
- Switching with telegram reception confirmation (red LED)
- dimming
- Blind and shutter control
- Dimming value encoder
- Light scene auxiliary unit with memory function

If a different assignment of the rockers is required, please use 3-gang push button sensor 2 with controller **1063 ...**

Back-lit, large-area inscription space (39 x 54 mm). Can be illuminated in accordance with the workplace ordinance.

Radio bus system

Push button sensor can be attached to radio wall-transmitter insert.

Rockers are freely configurable:

- switching or
- dimming or
- blind or shutter control or
- calling up of max. five light scenes and calling up of All OFF.

Telegram transmission confirmation via red LED.

Temperature range: -5 °C to +45 °C

Protection type: IP 20

Connection: 2 x 5-pole plug connector

For integration in Stainless Steel Series 20, Series 21:


Intermediate plate 55 x 55 mm 0289 20 → Page 97.

Inscription sheets 1090 00 → Page 209.

Instabus bus coupler 0570 00 → Page 350.

Order no.	Packing unit	PS
-----------	--------------	----

Push button sensor 2, 3-gang with controller

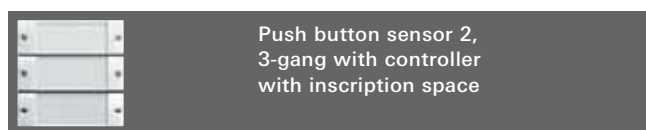

System 55			
transparent white	1063 100	1/5	06
E22			
Stainless steel (lacquered)	1063 20	1/5	06
Aluminium (lacquered)	1063 203	1/5	06
transparent white	1063 100	1/5	06
Bus coupler	0570 00	1/5	06

Disassembly safeguard implemented via its being screwed down.

Neutral inscription labels included.

Product family: Push button

Product type: Push button, 3-gang

The push button sensor is attached to a flush-mounted bus coupler. The following software variants are to be programmed with ETS 2:

- Free assignment of the functions switching/pressing, dimming, blinds, value transmitter/light scene auxiliary unit, analogue value transmitter and universal value transmitter EIS 6 to the 6 buttons or 3 rockers
- Status indication via 6 red LEDs possible
- Inscription space illumination ON, OFF, automatic switch-off or switchable via object
- Blocker for blocking individual buttons or rockers
- Alarm message after removal of the flush-mounted bus interface (1 bit/1 byte telegram)
- Switching/pressing function (ON, OFF, SW, no function)
- Dimming with stop telegram and telegram repetition possible
- Single-surface operation for rocker functions (switching/pressing, dimming) possible
- Blind press function (UP/DOWN) and operating concept (STEP - MOVE - STEP or MOVE - STEP) can be set
- Press functions of value transmitter EIS 6 (1 byte) or light scene execution with/without memory function
- Analogue value transmitter (EIS 5 or EIS 10), value adjustment possible by pressing and holding button
- Universal value transmitter EIS 6 for continuous run-through of a value range

Back-lit, large-area inscription space (39 x 54 mm). Can be lit in accordance with the workplace ordinance.

Temperature range: -5 °C to +45 °C

Protection type: IP 20

Connection: 2 x 5-pole plug connector

For integration in Stainless Steel Series 20, Series 21:

Intermediate plate 55 x 55 mm 0289 20 → Page 97.

Inscription sheets 1090 00 → Page 209.

Instabus bus coupler 0570 00 → Page 350.