


Order no.	Packing unit	PS
-----------	--------------	----

Order no.	Packing unit	PS
-----------	--------------	----

Flush-mounted home station

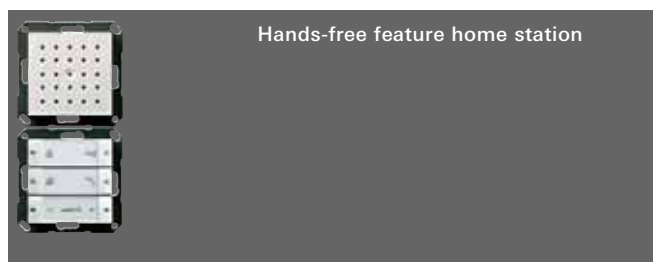

System 55 transparent white

cream white glossy	1280 101	1	18
pure white glossy	1280 103	1	18
pure white matt	1280 127	1	18
anthracite	1280 128	1	18
colour aluminium	1280 126	1	18

E22

Stainless Steel	1280 20	1	18
Aluminium	1280 203	1	18
pure white glossy	1280 103	1	18

F100

cream white glossy	1280 111	1	18
pure white glossy	1280 112	1	18

The hands-free feature home station offers the following product features:

- Uniform installation of door communication and electrical installation in the 58 mm flush-mounted box.
- Design variety via integration into the switch range, allowing uniform appearance of door communication and electrical installation.
- Signal transfer and supply of the audio and video components via reverse-polarity-protected and short-circuit-proof 2-wire bus.
- Modular structure, therefore simple installation and expandable with further components such as call button for home stations, TFT colour display etc.
- Parallel connection of up to 3 home stations possible.
- One-man commissioning through simple commissioning procedure.
- Ringing tone differentiation for door call, floor call and internal call.
- Operating buttons with integrated LEDs for status display.
- Hands-free feature (voice-controlled talk-back with echo and background noise suppression).
- Enforcement function for loud background noise during the voice connection.
- Free intercom communication within the house in combination with the call button for home stations.
- Eavesdropping prevention.
- Selection of 5 different ringing tone melodies, which can be assigned to individual call buttons.
- Automatic door opener can be connected: With the function activated, the door opener is automatically operated after pressing the door-station call button.
- This component enables door communication systems with more than 30 devices to be set up.

The operating button of the hands-free feature home station controls the following functions:

- Switching light and other functions in conjunction with the switching actuator **1289 00**.
- Operation of the door opener.
- Switching ringing tone on and off.
- Call acceptance.
- Activation of the enforcement function.
- Volume control of calling tone and speech volume.

Power supply: 26 V DC \pm 2 V (bus voltage)
 Bus coupler connections: two screw terminals for 2-wire bus
 two screw terminals for floor-call button
 2 system bus connector strips
 1 video connector strip
 Speech insert connections: 2 system bus connector strips
 Temperature range: -5 °C to +50 °C

Control device

Audio 1287 00 → Page 274.

Video (with expansion via TFT display) 1288 00 → Page 275.

Call button for home station 1283 .., 1285 .. → Page 268.

TFT colour display 1286 .. → Page 269.

TV gateway 2610 .. → Page 271.

Integration in a modular function profile → Page 161.

Integration in Profile 55 → Page 156.

For integration in Stainless Steel Series 20, Series 21:

Intermediate plate 55 x 55 mm 0289 20 → Page 97.

