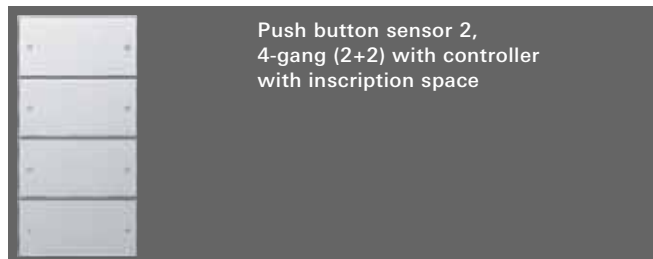


Order no.	Packing unit	PS
-----------	--------------	----

**F100**

cream white glossy	2064 111	1	06
pure white glossy	2064 112	1	06

Second support ring	1127 00	5/25	06
---------------------	----------------	------	----

Bus coupler	0570 00	1/5	06
-------------	----------------	-----	----

Disassembly safeguard implemented via its being screwed down.
Neutral inscription labels included.

Use support ring **1127 00** for installation on two flush-mounted wall boxes.

Product family: Push button

Product type: Push button, 4-gang

The push button sensor is attached to **one** flush-mounted bus coupler.
The following software variants are to be programmed with ETS 2:

- Free assignment of the functions switching/pressing, dimming, blind, value transmitter/light scene auxiliary unit, analogue value transmitter and universal value transmitter EIS 6 to the 8 buttons or 4 rockers
- Status indication via 8 blue LEDs possible
- Blocker for blocking individual buttons or rockers
- Alarm message after removal of the flush-mounted bus interface (1 bit/1 byte telegram)
- Switching/pressing function (ON, OFF, SW, no function)
- Dimming with stop telegram and telegram repetition possible
- Single-surface operation for rocker functions (switching/pressing, dimming) possible
- Blind press function (UP/DOWN) and operating concept (STEP - MOVE - STEP or MOVE - STEP) can be set
- Press functions of value transmitter EIS 6 (1 byte) or light scene execution with/without memory function
- Analogue value transmitter (EIS 5 or EIS 10), value adjustment possible by pressing and holding button
- Universal value transmitter EIS 6 for continuous run-through of a value range

Four large-area inscription spaces (33.5 x 67 mm). Can be lit in accordance with the workplace ordinance.

Temperature range: -5 °C to +45 °C

Protection type: IP 20

Connection: 2 x 5-pole plug connector

Inscription sheets 2872 .. → Page 209.

Support ring 1127 00 → Page 377.

Instabus bus coupler 0570 00 → Page 350.

Order no.	Packing unit	PS
-----------	--------------	----

Push button sensor 2, 6-gang with controller**System 55**

transparent white	1066 100	1	06
-------------------	-----------------	---	----

E22

Stainless steel (lacquered)	1066 20	1	06
-----------------------------	----------------	---	----

Aluminium (lacquered)	1066 203	1	06
-----------------------	-----------------	---	----

transparent white	1066 100	1	06
-------------------	-----------------	---	----

Second support ring	1127 00	5/25	06
---------------------	----------------	------	----

Bus coupler	0570 00	1/5	06
-------------	----------------	-----	----

Disassembly safeguard implemented via its being screwed down.

Neutral inscription labels included.

Use support ring **1127 00** for installation on two flush-mounted wall boxes.

Product family: Push button

Product type: Push button, 6-gang

The push button sensor is attached to **one** flush-mounted bus coupler.
The following software variants (rocker or button application) are to be programmed with ETS 2:

- Push button sensor configurable with either 6 rocker or 12 button functions.
- Rocker functions: Switching, dimming, blinds, value transmitter/light scene auxiliary unit, analogue value transmitter and universal value transmitter EIS 6 to the 6 rockers
- Touch function, rocker functions only switching: „Switching/pressing“ or „no function“ to the 12 buttons or 6 rockers
- Status indication via 12 red LEDs possible
- Inscription space illumination ON, OFF, automatic switch-off or switchable via object
- Blocker for blocking individual buttons or rockers
- Alarm message after removal of the flush-mounted bus interface (1 bit/1 byte telegram)
- Switching/pressing function (ON, OFF, SW, no function)
- Dimming with stop telegram and telegram repetition possible
- Single-surface operation for rocker functions (switching/pressing, dimming) possible
- Blind press function (UP/DOWN) and operating concept (STEP - MOVE - STEP or MOVE - STEP) can be set
- Press functions of value transmitter EIS 6 (1 byte) or light scene execution with/without memory function
- Analogue value transmitter (EIS 5 or EIS 10), value adjustment possible by pressing and holding button
- Universal value transmitter EIS 6 for continuous run-through of a value range

Two back-lit, large-area inscription spaces (39 x 54 mm). Can be lit in accordance with the workplace ordinance.

Temperature range: -5 °C to +45 °C

Protection type: IP 20

Connection: 2 x 5-pole plug connector

Installation only possible in combination with System 55 or E22 cover frame, 2-gang without crossbar 1002 .., 2886 ..

Inscription sheets 1090 00 → Page 209.

Support ring 1127 00 → Page 377.

Instabus bus coupler 0570 00 → Page 350.